



TORO RIDE ON MOWERS



Count on it.

Designed for Homeowners

Toro has a wide portfolio of ride on mower options for any size garden, large or small. The Toro range has many patented technologies and features, designed to make our mowers noticeably more comfortable and easy to use, whilst delivering the excellent standards of finish you expect from a quality mower.

Toro ride on mowers are engineered to efficiently handle extreme conditions and challenging terrain, without sacrificing cut quality or your comfort. Their unmatched maneuverability for cutting around trees and landscaping, power and durability, all contribute to produce long-lasting performance.

Which one is right for you?

Whether it's for dependable performance, maneuverability or heavy-duty applications, Toro has a mower that's right for you.



TimeCutter® SS Series

BEST FOR:
Maneuverability and time saving.



TimeCutter® MX Series

BEST FOR:
Durable and dependable performance and maneuverability.



TimeCutter® Zero Turn Tractor Series

BEST FOR:
Side hill stability and maneuverability.



Titan® Series


BEST FOR:
Heavy-duty applications where terrain is more rugged.

TORO® Premium Engines

Built for Maximum Performance

Both Toro's premium single cylinder and new V-Twin engines are tuned specifically to the requirements of each machine they power, so they're ideal for the applications they're made for. Their intelligent design and tight tolerances help the governor respond faster with more power when you need it, so you're ready to handle your toughest outdoor tasks. With heavy-duty components and innovative features, it's the perfect match for the job you need to do. And like every product that carries the Toro name, they're built to last.

It's all part of a tradition of quality that began in 1914, when Toro started as an engine manufacturing company. After more than 100 years of turf care industry leadership, we're still making products you can count on.

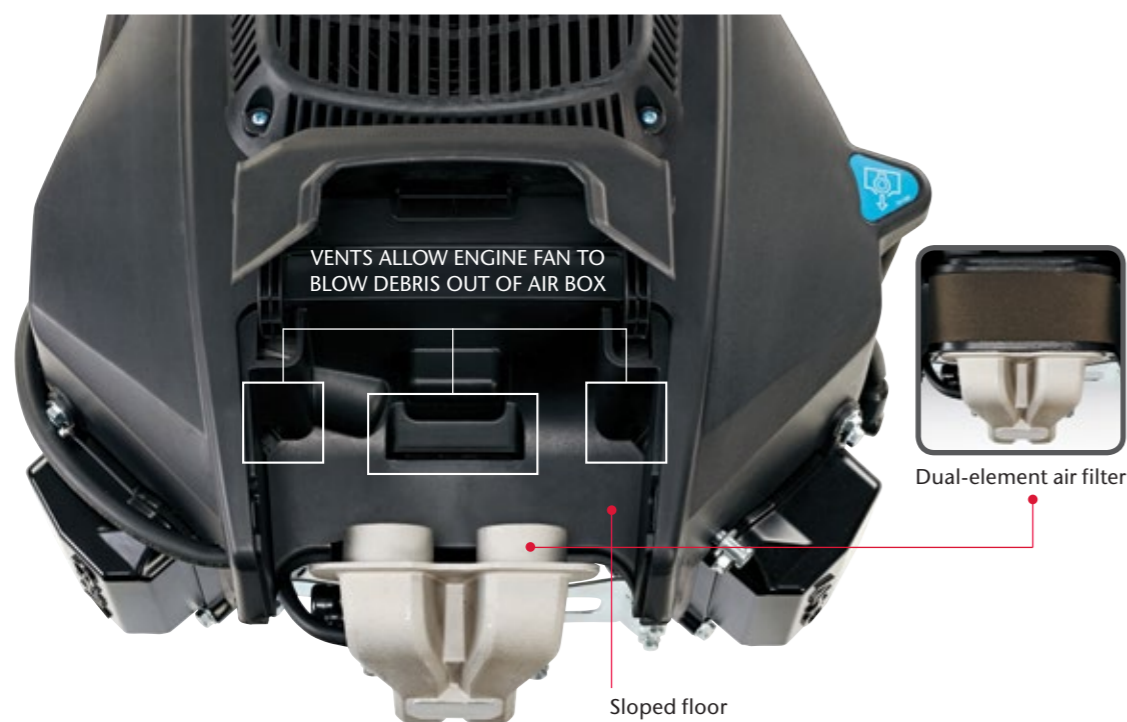

Self-Cleaning Air Filtration System

This patent-pending system features a self-cleaning air box with a dual-element air filter and a sloped floor that keeps debris out of the engine — maximising filter life and engine performance. Available on V-Twin engines only.

KEY FEATURES



Two-Barrel Carburetor

The two-barrel carburetor allows a stream of air and fuel mixture to be dedicated to each cylinder separately for maximum power and performance. Available on V-Twin engines only.



Quick-Drain Oil Hose

Just pop the hose out of its holder to drain the oil and pop it back in its holder when finished, no tools required. Available on V-Twin engines only.



Vacuum Override Choke

Once the engine starts, the choke is overridden automatically — allowing for smoother starts. Available on V-Twin engines only.



5-Bolt Heads

Provide tighter seal for added durability. Available on V-Twin engines only.



Heavy-Duty Air Cleaner Hinge

Tough components are built to last for added longevity. Available on V-Twin engines only.



Automotive-Style Piston Assembly

Triple ring design reduces engine oil consumption and blowby for maximum power.



Cast-Iron Cylinder Liners

Durable construction delivers extended wear for longer engine life.

Toro Premium Engine Benefits:

Single Cylinder

- Overhead valve (OHV) design
- Cast iron cylinder liner
- Triple piston rings
- Oversized crankshaft bearings
- Die cast connecting rod
- Hardened valve guides
- Automatic compression release
- Full pressure lubrication oil filter
- Large dual-stage air filter



V-Twin

- Self-cleaning air filtration system
- Two-barrel carburetor
- Quick-drain oil hose
- Vacuum override choke
- 5-bolt heads
- Heavy-duty air cleaner hinge
- Cast-iron cylinder liner
- Automotive-style piston assembly



Tested, Proven Performance

All Toro® premium engines are tested with proprietary procedures and methods perfected over decades of manufacturing experience. Because of these tests, we're able to refine our engines for optimal performance every time the product is used.

We take quality control very seriously. Before each Toro premium engine leaves the assembly line, it is tested under load and checked for power levels and governor response to ensure consistent peak performance. Components are held to tight tolerances to ensure consistent production. And every batch of parts that enters the engine manufacturing facility is checked and certified before use in production.

Bottom line: You can recommend Toro premium engines with confidence.

Warranty

All Toro premium OHV engines are fully covered by The Toro Company for 3 years.*

*For further details, please contact your Toro certified dealer or refer to the individual machine Operator's Manual.

Scan to watch a video on Toro® engines.




TimeCutter® Zero Turn Mowers

Innovation and Durability You Can Count On

Toro's innovative features simplify operation and reduce trimming to help you save time so you can spend more time enjoying your lawn and less time mowing it. The Toro TimeCutter® cuts your mowing time almost in half†, which means less work for you and your mower. You'll not only have more time to enjoy, you'll extend the working life of your mower.

Smart Features.
Proven Dependability.

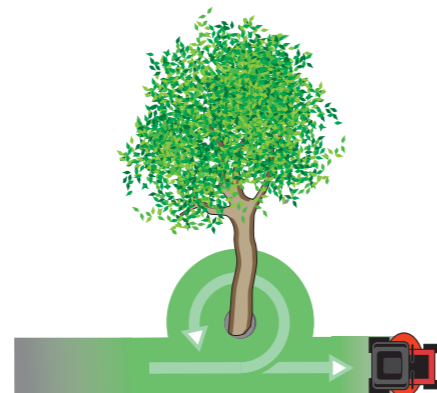


Zero Turn Technology and Save Time

For more than 25 years, Toro has been manufacturing zero turn mowers that deliver an outstanding quality of cut along with the time savings of zero turn technology. Just as Toro is the choice of professional landscapers, Toro TimeCutter® mowers are the smart choice for you. You'll mow like a pro and you'll do it all in a lot less time.

Work Smarter, Not Harder

The time saved with a Toro zero turn mower quickly adds up. Find your yard size on this graph and discover how much mowing time our customers have reported saving with their Toro zero turn mower.

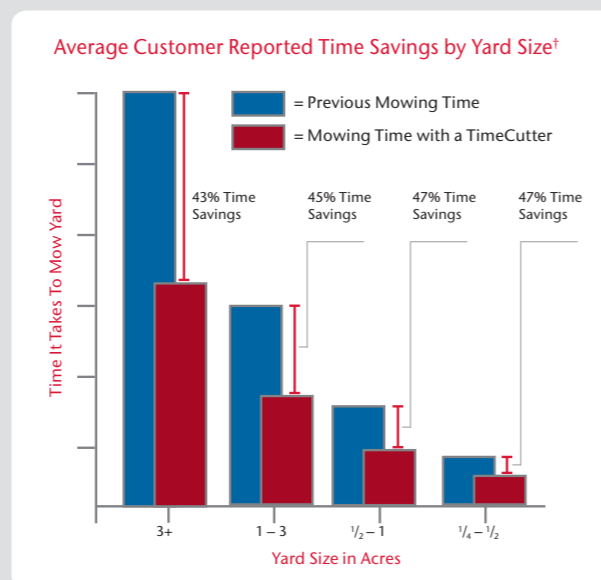

† Time savings by yard size are from 2007 to 2008 survey results for Toro residential zero turn mowers, as reported by owners.

Smart Speed® Control System

Toro's exclusive Smart Speed® control system takes the time-saving speed and agility of a zero turn mower and adds greater control. These exclusive Toro innovations let you choose different ground speed ranges with the flip of a lever without changing the blade or engine speeds.



Three ground speed ranges - Trim, Tow, Mow

Toro's Smart Speed® control system lets you choose from three ground speed ranges for optimal performance. Use low TRIM range to trim closer for maximum time savings, choose medium TOW range for towing attachments, or select high MOW range to mow large open areas and finish quickly (excludes models 74784 and 74797).



Scan to learn more about the Toro TimeCutter.



How to drive a Zero Turn

Millions of homeowners have discovered the ease-of-use and time saving advantages of zero turn mowers. They are as easy and intuitive to drive as a shopping cart.

EASY OPERATION

Lever steering is as intuitive as driving a shopping cart. Push or pull as shown to steer where you want to go.



Scan to see video on how easy it is to drive a zero turn.



TimeCutter® SS Series

Make the Smart Choice



Save your mowing time with the zero turn mower compared to a standard lawn tractor. It's as rugged and tough as it is agile and smooth. The TimeCutter® SS offers 25 years of expert zero turn mower design and development, placing the professional brand in your capable hands - allowing you to groom your lawn like the pros.

Model No	SS 3225 (74710)	SS 4200 (74720)	SS 4250 (74723)	SS 5000 (74731)
Engine	452 cc Toro® OHV Single Cylinder	452 cc Toro® OHV Single Cylinder	708 cc Toro® OHV V-Twin Cylinder	708 cc Toro® OHV V-Twin Cylinder
Cutting Width	32 inch (81.3 cm)	42 inch (106.7 cm)	42 inch (106.7 cm)	50 inch (127 cm)
Deck Material	Stamped Steel	Stamped Steel	Stamped Steel	Stamped Steel
Ground Speed	Smart Speed® Control System – 3 speed range, 0 – 11.3 km/h	Smart Speed® Control System – 3 speed range, 0 – 11.3 km/h	Smart Speed® Control System – 3 speed range, 0 – 11.3 km/h	Smart Speed® Control System – 3 speed range, 0 – 11.3 km/h

IDEAL FOR
2 ACRES

IDEAL FOR
3 ACRES

IDEAL FOR
3 ACRES

IDEAL FOR
4 ACRES



*See your dealer for full details on warranties.

KEY FEATURES



Automatic Parking Brake
Automatically engages when the control arms are moved outward. Eliminates the need for a separate parking brake, making operation easy.



Powerful Toro® Premium OHV and Kohler® Engines
Powerful Toro® single and V-Twin cylinder and Kohler® V-Twin engines provide smooth, quiet and optimal power.



Comfortable Seats
15" (38.1 cm) mid back or 18" (45.7 cm) high back seats provide ample back support for a smooth, comfortable ride.



Deep 10.2 cm Steel Deck
Provides superior cutting performance in all conditions.



Smart Speed® Control System – Three Speed Range - Trim, Tow, Mow
Use low TRIM range to trim closer for maximum time savings, choose medium TOW range for towing attachments, or select high MOW range to mow large open areas and finish quickly.



Dual Hydrostatic Drive System
Provides independent power to each wheel for maximum traction and maneuverability.



Heavy-duty 10 Gauge Frame
Provides increased strength, durability and reliability.



TimeCutter® MX Series

The Added Toughness of a Fabricated Deck



TimeCutter® MX zero turn mowers offer the same time-saving speed and agility of a TimeCutter® SS with the added strength and durability of a fabricated deck and heavy-duty transmissions. The convenient hour meter and height-of cut assist pedal also help you work smarter, not harder.

Model No	MX 3450 (74750)	MX 4250 (74760)	MX 5050 (74770)
Engine	452 cc Toro® OHV Single Cylinder	708 cc Toro® OHV V-Twin Cylinder	725 cc Kohler® 7000 Series V-Twin
Cutting Width	34 inch (86.3 cm)	42 inch (106.7 cm)	50 inch (127 cm)
Deck Material	Fabricated Deck	Fabricated Deck	Fabricated Deck
Ground Speed	Smart Speed® Control System – 3 speed range, 0 – 11.3 km/h	Smart Speed® Control System – 3 speed range, 0 – 11.3 km/h	Smart Speed® Control System – 3 speed range, 0 – 11.3 km/h

IDEAL FOR 2 ACRES

IDEAL FOR 3 ACRES

IDEAL FOR 4 ACRES



*See your dealer for full details on warranties.

KEY FEATURES



Powerful Toro® Premium OHV and Kohler® Engines

Powerful Toro® single and V-Twin cylinder and Kohler® V-Twin engines provide smooth, quiet and optimal power.



Fabricated Deck

Welded together from plates of 10-gauge steel and a bull-nose bumper leading the way, this deck can handle tough conditions. The lower the gauge the thicker the steel.



Height-of-Cut Assist Pedal

Foot-assist height of cut makes it easier for you to raise and lower the fabricated deck.



Dual Hydrostatic Drive System

Provides independent power to each wheel for maximum traction and maneuverability.



Smart Speed® Control System – Three Speed Range - Trim, Tow, Mow

Use low TRIM range to trim closer for maximum time savings, choose medium TOW range for towing attachments, or select high MOW range to mow large open areas and finish quickly.



Automatic Parking Brake

Automatically engages when the control arms are moved outward. Eliminates the need for a separate parking brake, making operation easy.



Heavy-duty 10-Gauge Frame

Provides increased strength, durability and reliability.



TimeCutter® Zero Turn Tractor Series

The Best of Both Worlds



Now you can have your lawn tractor and your zero turn mower too. Toro's innovative TimeCutter® SW/SWX lawn mowers are the perfect blend of both. You get the controls and side hill stability of a lawn tractor with the maneuverability and time savings of a zero turn lawn mower.

Model No	SW 4200 (74784)	SWX 5050 (74797)
Engine	708 cc Toro® OHV V-Twin Cylinder	708 cc Toro® OHV V-Twin Cylinder
Cutting Width	42 inch (106.7 cm)	50 inch (127 cm)
Deck Material	Stamped Steel	Fabricated Deck
Ground Speed	0 – 11.3 km/h	0 – 11.3 km/h

IDEAL FOR 3 ACRES

IDEAL FOR 4 ACRES

KEY FEATURES



Toro® V-Twin Engine

The Toro V-Twin engine features a two-barrel carburetor, quick-drain oil hose, vacuum override choke and self-cleaning air filtration system. Maximum power, smartly designed maintenance.



Adjustable Steering Column

Steering column adjusts for maximum comfort for any operator.



Smart Park™ Braking System

Toro's unique braking system automatically stops the mower deck and sets the parking brake when you need to get off the mower while keeping the engine running.



Key Choice™ Mowing System

Remove the key to prevent others from mowing in reverse for added piece of mind.



Dual Hydrostatic Drive System

Independent hydrostatic drive systems provide responsive maneuverability and zero turning capabilities. These independent drives are anchored to Toro's unibody frame and reinforced with a cross member for lasting durability and performance.



Comfortable Seats

15 inch (38.1 cm) mid-back or 18 inch (45.7 cm) thickly padded premium seats provide ample back support for a smooth, comfortable ride.



Heavy-Duty Construction

Features thick, 10-gauge steel frames, heavy-duty engine guards and large caster forks for added durability. Heavy-duty cast iron and steel front axle provide years of dependable performance.



*See your dealer for full details on warranties.

Titan® Series

Ready for the Toughest Demands



The TITAN® ZX/MX series combines pro-inspired features from our popular commercial line with the user-friendly features of our residential zero turn mowers to create a commercial-like machine that's easy to use and comfortable to operate. The TITAN® gives you pro-like performance with Kohler® V-Twin cylinder engines, large wide tyres and heavy-duty decks and frame for taking on the toughest challenges. And if your neighbours think you hired a professional, well, just smile and show them your rugged, powerful TITAN® mower.

Model No	ZX4800 (74861)	MX5400 (74892)
Engine	725 cc Kohler® V-Twin with canister air cleaner	747 cc Kohler® V-Twin with canister air cleaner
Cutting Width	48 inch (121.9 cm)	54 inch (137.2 cm)
Deck Material	Fabricated Deck	Fabricated Deck
Ground Speed	0 - 13.6 km/h	0 - 13.6 km/h

IDEAL FOR 4 ACRES

IDEAL FOR 4 ACRES

3 YEAR
300 HOUR
LIMITED WARRANTY*

model 74861

4 YEAR
400 HOUR
LIMITED WARRANTY*

model 74892

LIFETIME
FRAME
LIMITED WARRANTY*

*See your dealer for full details on warranties.

KEY FEATURES

Pro-Inspired

The TITAN® Series leverages professional features similar to those found on our commercial zero turn mowers to change your experience of mowing forever. Each component adds to the strength and durability of the machine, providing long-lasting, superior performance.



Smooth Front Tyres and Large Rear Tyres

33 cm x 12.7 cm (model 74861) and 33 cm x 16.5 cm (model 74892) smooth front tyres reduce turf wear and improve maneuverability. The 55.8 cm x 25.4 cm – 25.4 cm (model 74861) and 55.8 cm x 25.4 cm – 30.5 cm (model 74892) large, wide rear tyres provide a smoother ride over rough terrain than smaller diameter tyres.



Fully-Tubular Frame

3.8 cm x 7.6 cm fully-tubular frame offers superior strength and durability.



Heavy-Duty Deck Spindles

Huge 19.7 cm diameter aluminium spindle housings contain 2.5 cm diameter spindle shafts.



Kohler® Confidant Commercial Engine

Powered by a Kohler® Confidant commercial engine that features heavy-duty canister-style air cleaners, cast-iron cylinder liners, oversized micro-polished crankshaft bearings, and full pressure lubrication. Plus a modulated cooling fan to keep the engine cooler and quieter.




121.9 cm and 137.2 cm Wide Fabricated Decks

Fabricated, fully-welded decks with bull-nose bumpers handle tough cutting conditions and deliver a superior quality of cut.

User-Friendly Residential Expertise

Our zero-turn mowers are all about saving time, ease-of-use and low maintenance. These user-friendly and comfort-focused features are built into every TITAN® mower, making it the best mower for the biggest yards.




Premium Seat with 3-D Isolation

Toro premium seat with 3-D isolation mounts to absorb vibration on model 74892 and thickly padded premium seat on model 74861.



Effortless Maintenance

Quick, no-tools deck removal allows easy access to deck for maintenance.



Flip-Up Floor Pan

The flip-up floor pan makes it easy to access to the top of the deck for cleaning off grass clippings. It's also pierced with small holes for a textured grip and natural drain holes.



Foot-Operated Height-of-Cut

Quickly raise or lower the deck while keeping hands on the controls.



Commercial Grade ZT-3100 Hydrostatic Transmission

The commercial-grade ZT-3100 hydrostatic transmissions combine consistent performance with easy maintenance.

Customise Your Mower with Genuine Toro Attachments and Accessories

ATTACHMENTS AND ACCESSORIES



Recycler® Mulch Kit

The Toro Recycler mulching system creates your own natural fertiliser. This patented system cuts grass clippings 6-8 times turning them into a fine nutrient-rich mulch to feed your lawn all season.

The secret lies in the unique 'kickers' and baffles that direct clippings back into the blades to be re-cut before being released into your lawn.



Twin Bagger

Attaches easily and is great for cleaning up grass clippings and leaves.



Product Cover

Protect your investment with a water, abrasion and tear resistant cover.



ROPS Folding Pin Kit

Kit allows ROPS to fold easily for storage.

(available on Titan mowers only.)



Tow-Behind Dump Cart

Transporting material is easy with this heavy-duty poly bed large dump cart.



Bimini Folding Sunshade

Optional fabric shade for 2-post ROPS shields the operator from the elements.



Hour Meter

Keep your mower in peak condition by adding an hourmeter for determining service maintenance.



Foot Assist Height of Cut System

Allows you to quickly and easily raise the mowing deck while mowing to avoid scalping and can also be used to lift the mowing deck while changing height of cut positions.



Heavy-Duty Rear Engine Guard

This heavy-duty steel guard protects the engine from branches and debris as you nimbly maneuver around your lawn.




Light Kit

Gives you the option to mow your grass in low light conditions.



Armrest Kit

Adjustable armrests improve operator productivity by reducing fatigue.



Anti-Vibration Floor Mat

This newly designed rubber floor mat is a great addition to your TimeCutter®/Titan® mower. Reduce vibration and dampens deck noise during mowing.



Hitch Kit

The hitch kit is easily attached, which allows you to increase the functionality of your mower by allowing you to pull light duty attachments.



E-Z VAC Powered Bagger

Provides extra vacuum power to bag even wet grass and leaves. The blower reduces clogging and maximises bag filling.

(fits Titan & Titan MX model years 2010 & newer)



Cargo Carrier

Perfect for light duty hauling capabilities for mulch, soil, garden tools and other items for working in the yard. No "jack knifing" and it's easy to store.

(fits TimeCutter model years 2011 & newer. Fits Titan model years 2009 & newer.)



Seat Cover

Provides protection to the seats from weathering and damage. The cover is held firmly in place with an elastic cord and made with polyester, water-resistant fabric.

Warranty

Building the best machines in the industry allows us to back them with the best warranty in the industry. Ask your dealer to learn about our warranty coverage.

- 3 years Limited Warranty on TimeCutter® SS, MX and Zero Turn Tractor mowers

- 3 years or 300 hours^ Limited Warranty on Titan® ZX mower and 4 years or 400 hours^ Limited Warranty on Titan® MX mower and a limited lifetime frame warranty^^ for both Titan mowers.

^Whichever occurs first.

^^Original owner only. Lifetime Frame Warranty — If the main frame, consisting of the parts welded together to form the tractor structure that other components such as the engine are secured to, cracks or breaks in normal use, it will be repaired or replaced under warranty at no cost for parts and labor. Frame failure due to misuse or abuse and failure or repair required due to rust or corrosion are not covered.



Finance

Purchasing Toro products is easy and affordable with special Toro sponsored finance promotions available through your participating certified Toro independent dealer.


SPECIFICATIONS

	TimeCutter® SS				TimeCutter® MX		
	SS 3225	SS 4200	SS 4250	SS 5000	MX 3450	MX 4250	MX 5050
Model No	74710	74720	74723	74731	74750	74760	74770
Power System							
Engine**	452 cc Toro® OHV Single Cylinder 16 hp	708 cc Toro® OHV V-Twin Cylinder 24.5 hp	708 cc Toro® OHV V-Twin Cylinder 24.5 hp	708 cc Toro® OHV V-Twin Cylinder 24.5 hp	452 cc Toro® OHV Single Cylinder 16 hp	708 cc Toro® OHV V-Twin Cylinder 24.5 hp	725 cc Kohler® 7000 Series V-Twin 24 hp
Engine Guard	Standard				Standard		
Starter	Electronic Keystart				Electronic Keystart		
Drive System	Dual Hydrostatic Hydro-Gear® ZT 2100			Dual Hydrostatic Hydro-Gear® ZT 2200	Dual Hydrostatic Hydro-Gear® ZT 2200		Dual Hydrostatic Hydro-Gear® ZT 2800
Fuel Capacity	11.4 litres				11.4 litres		
Ground Speed (Maximum)	Smart Speed® Control System - 3 Speed Range 11.3 km/h				Smart Speed® Control System - 3 Speed Range 11.3 km/h		
Tyres (Rear)	45.7 cm x 15.2 cm	45.7 cm x 19 cm	45.7 cm x 19 cm	45.7 cm x 24.1 cm	45.7 cm x 15.2 cm	45.7 cm x 19 cm	50.8 cm x 25.4 cm
Tyres (Front)	28 cm x 10.2 cm			33 cm x 12.7 cm	28 cm x 10.2 cm	28 cm x 10.2 cm	33 cm x 12.7 cm
Digital Hour Meter	Standard	Optional	Standard	Optional	Standard		
Mowing Decks							
Cutting Width	32 inch (81.3 cm)	42 inch (106.7 cm)	42 inch (106.7 cm)	50 inch (127 cm)	34 inch (86.4 cm)	42 inch (106.7 cm)	50 inch (127 cm)
Deck Material	Stamped Steel – Single blade	Stamped Steel – Twin blade	Stamped Steel – Twin blade	Stamped Steel – Triple blade	Fabricated – Twin blade	Fabricated – Twin blade	Fabricated – Triple blade
Deck Depth	12 cm				10.2 cm		
Deck Mount	Deck suspended from front frame by a single trunion rod and attached to lift mechanism by two hanger brackets				Deck suspended from front frame by a single trunion rod and attached to lift mechanism by two hanger brackets		
Deck Spindles	19.9 mm dia. spindle shaft, die cast aluminium spindle housing (1) with permanently lubricated precision ball bearings	17.0 mm dia. spindle shaft, die cast aluminium spindle housing (2) with permanently lubricated precision ball bearings		17.0 mm dia. spindle shaft, die cast aluminium spindle housing (3) with permanently lubricated precision ball bearings	17.0 mm dia. spindle shaft, die cast aluminium spindle housing (2) with permanently lubricated precision ball bearings		17.0 mm dia. spindle shaft, die cast aluminium spindle housing (3) with permanently lubricated precision ball bearings
Discharge Deflector	Moulded plastic				Moulded plastic		
Height of Cut	3.8 – 11.4 cm, 7 positions				3.8 – 11.4 cm, 7 positions		
Blade Tip Speed**	18,959 ft/min @ 3400 RPM	17,810 ft/min @ 3400 RPM	17,810 ft/min @ 3400 RPM	18,330 ft/min @ 3400 RPM	17,810 ft/min @ 3400 RPM	17,810 ft/min @ 3400 RPM	18,330 ft/min @ 3400 RPM
Anti-Scalp Rollers	-	-	2 Standard	3 Standard	Standard		
Foot Assist HOC	Optional				Standard		
Frame Gauge	10-gauge				10-gauge		
Recycler Kit	Optional				Optional		
Washout Port	Standard				Standard		
User-Friendly Features							
Seat	45.7 cm High back	38.1 cm Mid back	45.7 cm High back	45.7 cm High back	45.7 cm Thickly Padded Premium		
Steering Levers/Control	Dual wrap-around levers control the hydraulic pumps in the transaxles				Dual wrap-around levers control the hydraulic pumps in the transaxles		
Turning Radius	Zero radius turn (ZTR)				Zero radius turn (ZTR)		
Adjustable Armrests	Optional	-	Standard	Optional	Standard		
Flip-up Floor Pan	-	-	-	-	-	-	-
Floor Mat	Standard	Optional			Standard		
Hitch Kit	Standard				Standard		
Dimensions							
Overall Length	182.4 cm	182.4 cm	182.4 cm	185.2 cm	182.4 cm	182.4 cm	185.2 cm
Overall Width	99.6 cm (deflector down)	136.7 cm (deflector down)	136.7 cm (deflector down)	160 cm (deflector down)	117.1 cm (deflector down)	137.2 cm (deflector down)	156.7 cm (deflector down)
Overall Height	94.7 cm	94.7 cm	94.7 cm	105.4 cm	106.7 cm	106.7 cm	107.7 cm
Weight	210.9 kg	224.5 kg	232.3 kg	263 kg	236.3 kg	255 kg	290 kg
Warranty*	3 years				3 years		

*See dealer for full warranty details. **The gross or net torque of this engine was laboratory rated by the engine manufacturer in accordance with the appropriate SAE specification. As configured to meet safety, emission and operating requirements, the actual engine torque on this class of mower will be significantly lower. We reserve the right to improve our products and make changes in the specifications, designs and standard equipment without notice and without incurring obligation.

TimeCutter® Zero Turn Tractor		Titan®	
SW 4200	SWX 5050	ZX 4800	MX 5400
74784	74797	74861	74892
Power System			
708 cc Toro® OHV V-Twin Cylinder 24.5 hp	708 cc Toro® OHV V-Twin Cylinder 24.5 hp	725 cc Kohler® V-Twin with Canister Air cleaner 21 hp	747 cc Kohler® V-Twin with Canister Air Cleaner 23 hp
Standard		Standard	
Electronic Keystart		Electronic Keystart	
Dual Hydrostatic Hydro-Gear® ZT 2100	Dual Hydrostatic Hydro-Gear® ZT 2800	Dual Hydrostatic Hydro-Gear® ZT 3100 with charge pumps	Dual Hydrostatic Hydro-Gear® ZT 3100 with charge pumps
11.4 litres		18.9 litres	
11.3 km/h		13.6 km/h	
45.7 cm x 19 cm	50.8 cm x 25.4 cm	55.8 cm x 25.4 cm – 25.4 cm	55.8 cm x 25.4 cm – 30.5 cm
33 cm x 12.7 cm	33 cm x 12.7 cm	33 cm x 12.7 cm Smooth	33 cm x 16.5 cm Smooth
Optional	Standard	Standard	
Mowing Decks			
42 inch (106.7 cm)	50 inch (127 cm)	48 inch (121.9 cm)	54 inch (137.2 cm)
Stamped – Twin blade	Fabricated – Triple blade	10-gauge fabricated with bull-nose bumper	
12 cm	10.2 cm	11.5 cm	
Deck suspended from front frame by a single trunion rod and attached to lift mechanism by two hanger brackets		Deck suspended from the frame by heavy-duty chains. Deck front pivot panel prevents deck sway.	
17.0 mm dia. spindle shaft, die cast aluminium spindle housing (2) with permanently lubricated precision ball bearings	17.0 mm dia. spindle shaft, die cast aluminium spindle housing (3) with permanently lubricated precision ball bearings	Three 20.3 cm dia. die cast aluminium spindle housing with permanently lubricated ball bearings and 2.5 cm spindle shafts	
Moulded plastic		Moulded rubber	
3.8 – 11.4 cm, 7 positions		3.8-11.4 cm, 13 positions	
17,810 ft/min @ 3400 RPM	18,330 ft/min @ 3400 RPM	18,800+ ft/min @ 3700 RPM	18,644+ ft/min @ 3700 RPM
Standard		Standard	
-		Standard	
10-gauge		10-gauge	
Optional		Optional	
Standard		Standard	
User-Friendly Features			
38.1 cm Mid back	45.7 cm Thickly Padded Premium	Thickly Padded Toro Premium Seat with Adjustable Spring Suspension	Deluxe Bolstered Seat with Adjustable Suspension
Wheel Steering, adjustable with foot pedal		Dual, wrap-around control levers with hydraulic dampers	Dual, wrap-around control levers with hydraulic dampers and has oversized comfort grips
Zero radius turn (ZTR)		Zero radius turn (ZTR)	
-	Standard	Standard, Adjustable	
-		Flip-up	
Standard		-	
Standard		Standard	
200.4 cm	200.4 cm	206.2 cm	206.2 cm
136.7 cm (deflector down)	156.7 cm (deflector down)	156.7 cm (deflector down)	172.5 cm (deflector down)
115.3 cm	115.3 cm	187.7 cm (ROPS Up)	187.7 cm (ROPS Up)
270 kg	324 kg	353.3 kg	375.6 kg
3 years		3 years / 300 hours	4 years / 400 hours

**Blade tip speed is the theoretical maximum speed in feet per minute and is likely to vary.

 = Enhanced or step-up feature



Count on it.

Your local certified Toro dealer:

Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in use, design, required attachments and safety features. We reserve the right to improve our products and make changes in specifications, designs, and standard equipment without notice and without incurring obligation. The gross horsepower of the engines have been laboratory rated by the various engine manufacturers. As configured to meet safety, emission and operating requirements, the actual engine horsepower on this class may be significantly lower.

Many of the products you will find in certified Toro dealers' stores come with a warranty or guarantee from The Toro Company. In addition, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure. Full details of your consumer rights may be found at www.consumerlaw.gov.au

*See your certified Toro dealers for details on all of our warranties.

TORO15022016/IND-C0143
02-2016



Toro Customer Service 1800 356 372
toro.com.au

Follow us on Facebook and Twitter
[Facebook.com/toroaus](https://www.facebook.com/toroaus)
[Twitter.com/@toroaus](https://twitter.com/@toroaus)

Watch us on YouTube
[Youtube.com/toroaustralia](https://www.youtube.com/toroaustralia)