


On-off device to control the water flow in low pressure irrigation systems.

## Applications

Secondary zone water diversion and flow control. Always install as an in-line valve with tubes connected to both inlet and outlet.

## Features

- Simple on-off operation and straight through flow
- Operating pressure range up to 300 kPa
- Green Back® cap for standard irrigation applications
- Purple Back® cap for recycled water applications
- UV stabilised materials for long life

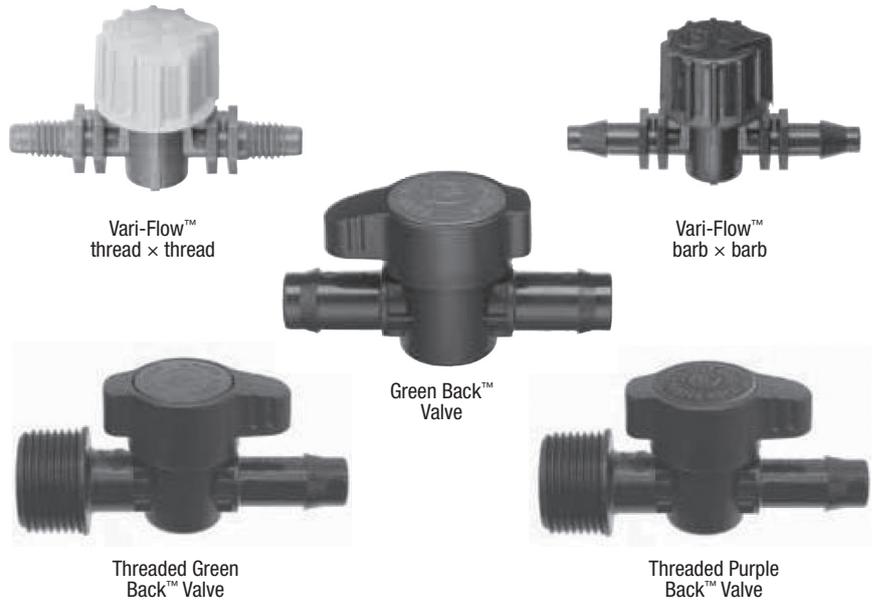

### Ordering Information

Type	Colour	Order Code	Pack Quantity	Packs Per Carton	Carton (kg)
<b>Vari-Flow™ Valve</b>					
VARI-FLOW™ VALVE barb x barb 4.5mm	Black	10142155	50	90	11.5
VARI-FLOW™ VALVE thread x thread 4.0mm	Black	10142115	50	90	11.5
<b>Green Back® Valve</b>					
GREEN BACK® VALVE 13 mm (Shank OD 12.6 mm)	–	10145505	20	25	9.4
GREEN BACK® VALVE 14 mm (Shank OD 14.0 mm)	–	10145575	20	25	9.6
GREEN BACK® VALVE 15 mm (Shank OD 14.6 mm)	–	10145555	20	25	9.5
GREEN BACK® VALVE 16 mm (Shank OD 15.7 mm)	–	10145515	20	24	9.9
GREEN BACK® VALVE 18 mm (Shank OD 17.6 mm)	–	10145565	20	10	8.9
GREEN BACK® VALVE 19 mm (Shank OD 19.0 mm)	–	10145525	20	10	8.7
GREEN BACK® VALVE 20 mm (Shank OD 20.5 mm)	–	10145535	20	10	9.3
GREEN BACK® VALVE 25 mm (Shank OD 25.0 mm)	–	10145545	20	4	7.1
<b>Threaded Green Back® Valve and Purple Back® Valve</b>					
GREEN BACK® VALVE 13 mm barb x 3/4" BSPM	–	10146605	20	22	10.4
PURPLE BACK® VALVE 13 mm barb x 3/4" BSPM	–	10146705	20	22	10.4

### Specifications

	Dimensions Assembled				UV Stabilised Materials				Base/Connection Type	
	H (mm)	L (mm)	W (mm)	Weight approx.	Body	Knob	Stem	Cover		
<b>Vari-Flow™ Valve</b>										
4.5 mm	21	40	15	2.5 g	acetal	HDPE	–	–	BARB 4.5mm	
4.0 mm	21	40	15	2.5 g	acetal	HDPE	–	–	10-32 UNF THREAD 4mm	
<b>Green Back® Valve and Purple Back® Valve</b>										
13 / 14 / 15 / 16 mm	40	81	28	18 g	acetal	–	poly-propylene	acetal	BARB	
18 / 19 / 20 mm	54	100	40	41 g	acetal	–	poly-propylene	acetal	BARB	
25 mm	71	124	53	81 g	acetal	–	poly-propylene	acetal	BARB	
<b>Threaded Green Back® Valve and Threaded Purple Back® Valve</b>										
13 mm	44	81	28	22 g	acetal	–	poly-propylene	acetal	3/4" BSPM Thread x Barb	