



Count on it.

Drip Eze® Landscape Drip Tube

Drip Eze extruded in-line drip tube is a precise, low flow irrigation product suited to a wide range of landscape applications.

The discreet brown tubing applies water at a slow consistent rate, minimising run-off and water wastage. Drip Eze is ideal for high density planting areas, intricately shaped landscape beds, median strips and garden beds where overspray cannot be tolerated.

Enviro-Drip™ is available for use with non-potable treated water.



Features and Benefits:

4mm and 13mm ID Tube

Drip Eze is available in 4mm and 13mm tube to suit a variety of landscape applications. Use with Australian standard poly fittings.

Classic & Pressure Compensating

Select from classic (NPC) or pressure compensating (PC) tube to suit the landscape requirements. PC provides even water application over steep and undulating terrain and allows for longer runs.

1.6 L/h and 2 L/h Flow Rates

Available in two discharge rates, Drip Eze applies water slowly to penetrate the root zone. Select from a range of spacings to suit your requirements.

Clog minimisation

Two directly opposed outlet holes minimise chance of clogging.

Suits most landscaping situations

Ideal for trees, shrubs, median strips and landscape beds. The flexible tubing, available in brown or lilac to signify non-potable water, is manufactured from low density polyethylene and can be mulched without loss of flow.



Drip Eze



Enviro-Drip




For use with non-potable water

TORO


Count on it.

Drip Eze[®] Landscape Drip Tube


**4mm Drip Eze NPC 2.0 L/h
Run Length v's Pressure Loss**

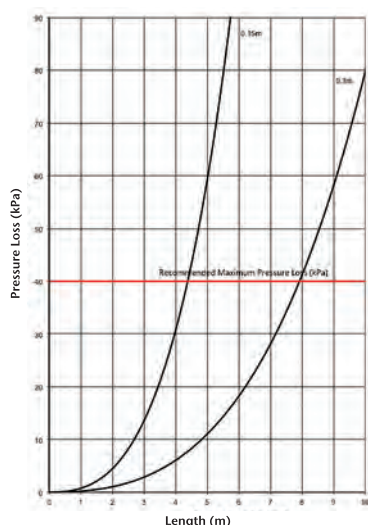


**13mm Drip Eze NPC 2.0 L/h
Run Length v's Pressure Loss**

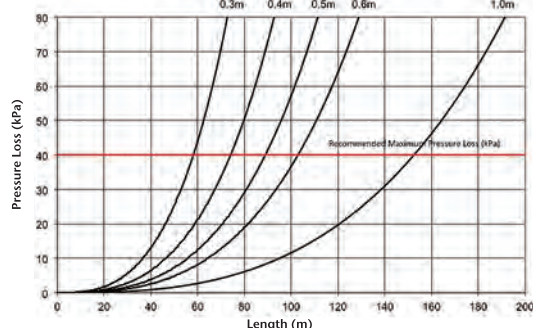

**13mm Drip Eze PC 1.6 L/h
Run Length v's Pressure Loss**

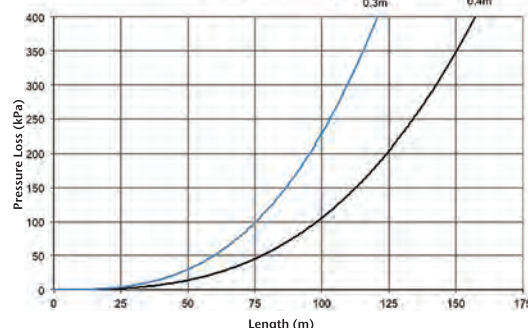

**13mm Drip Eze & Enviro-Drip PC 2.0 L/h
Run Length v's Pressure Loss**

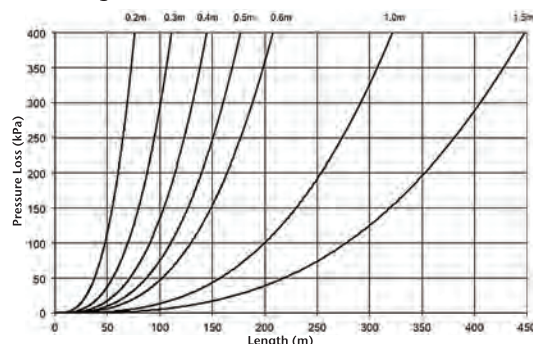

Specifications

| | Drip Eze | | | | Enviro-Drip |
|--------------------------------------|--------------------------|---------------------|---------------|---------------------|---|
| | 4 mm NPC | 13 mm NPC | 13 mm PC | 13 mm PC | 13mm PC |
| Tube inside diameter | 4 mm | 13 mm | 13 mm | 13 mm | 13 mm |
| Tube outside diameter | 6 mm | 15.4 mm | 15.4 mm | 15.4 mm | 15.4 mm |
| Discharge rate @ 100 kPa | 2.0 L/h | 2.0 L/h | 1.6 L/h | 2.0 L/h | 2.0 L/h |
| Emitter Spacing (cm) | 15, 30 | 30, 40, 50, 60, 100 | 40 | 30, 40, 50, 60, 100 | 30 |
| Recommended operating pressure range | 100 kPa | 100 kPa | 100 – 300 kPa | 100 – 300 kPa | 100 – 300 kPa |
| Tube pressure rating | 300 kPa | | | | |
| Roll lengths (m) | 25, 50, 100, 200 and 914 | 20, 50, 100, 200 | 50, 100, 200 | 20, 50, 100, 200 | 50, 100, 200 |
| Tube colour | Brown | Brown | Brown | Brown | Lilac – marked "Caution Not For Drinking" |
| Recommended filtration | Minimum 120 mesh screen | | | | |

Note: Not all spacings available in all roll lengths. Contact your Toro Representative for more information.

Maximum Run Lengths

| Product | Flow Rate (L/h) | Emitter Spacing | Run Length (m) 120 kPa Input | Run Length (m) 200 kPa Input | Run Length (m) 300 kPa Input |
|---------------------|-----------------|-----------------|------------------------------|------------------------------|------------------------------|
| 4mm NPC** | 2 | 0.15 | 4.5 | | |
| | 2 | 0.30 | 8 | | |
| 13mm NPC** | 2 | 0.30 | 60 | | |
| | 2 | 0.40 | 75 | | |
| | 2 | 0.50 | 85 | | |
| | 2 | 0.60 | 100 | | |
| | 2 | 1.00 | 150 | | |
| 13mm PC | 1.6 | 0.40 | | 100 | 125 |
| | 2 | 0.30 | | 70 | 85 |
| | 2 | 0.40 | | 90 | 105 |
| | 2 | 0.50 | | 110 | 135 |
| | 2 | 0.60 | | 125 | 160 |
| | 2 | 1.00 | | 200 | 255 |
| 13mm Enviro-Drip PC | 2 | 0.30 | | 70 | 85 |

Note: All pressure compensating tube run lengths are based on a minimum operating pressure of 100 kPa, single laterals and flat ground.

** All non-compensating tube run lengths are based on a variation in discharge of ± 10% of the nominal dripper flow rate, single laterals and flat ground.

**For more information, phone
1300 130 898 or visit www.toro.com.au**

TORO Toro Australia Pty Ltd