

Irritrol®



Irritrol's I-PRO™ PR Series spray bodies present a constant pressure at the nozzle of 276 kPa to help ensure the entire zone is performing consistently across each and every sprinkler. I-PRO PR Series spray bodies have been proven to eliminate water waste caused by nozzle misting and overspray that results from high pressure situations. Coupled with features that include a replaceable pressure-activated wiper seal, a rugged and heavy-duty textured body for a non-slip grip, and an easy-to-adjust ratchet, the pressure-regulating I-PRO spray bodies provide everything needed to be your everyday spray body.

I-PRO™ SERIES

INTEGRATED IN-RISER PRESSURE REGULATOR

Maintains consistent nozzle performance at 276 kPa and eliminates misting and overspray that results from high pressure or inconsistent pressure at the point of connection.

HEAVY-DUTY TEXTURED BODY

UV-resistant, professional-grade ABS construction for dependable performance whether in residential or commercial settings.

MALE THREAD RISER

Compatible with any female-threaded nozzle in the industry, including Irritrol, Rain Bird® and Hunter® nozzles**.

EASY-TO-ADJUST RATCHETING RISER

Requiring far less effort than competing spray bodies, the riser ratchet can be easily adjusted with wet hands while under pressure and maintains its position cycle after cycle.

AVAILABLE WITH PRE-INSTALLED CHECK VALVE

Prevents low-head drainage, eliminating flood or erosion damage by keeping water in lateral pipes in elevation changes up to 14'.

5-YEAR WARRANTY

All Irritrol products feature a 5-year warranty.

*Rain Bird is a trademark of Rain Bird® Corporation.

**Hunter is a trademark of Hunter Industries™.



4", 6" & 12" MODELS

Toro.com.au | Irritrol.com


SPECIFICATIONS

- Inlet size: ½" female BSP threads
- Exposed diameter: 2 ¼"
- Body diameter: 1 ⅝"
- Body height:
 - I-PRO400: 5 ¾"
 - I-PRO600: 9 ¼"
 - I-PRO1200: 16"
- Side inlet: 4 ⅜" from center of side inlet to top of cap
- Recommended operating pressure:
 - 345 - 517 kPa for PR40 models
 - Maximum operating pressure of 517 kPa
- Five-year warranty

SUPERIOR PERFORMING WIPER SEAL

Additional lubricant additive helps eliminate stick-ups

Tapered lip design prevents the intrusion of debris

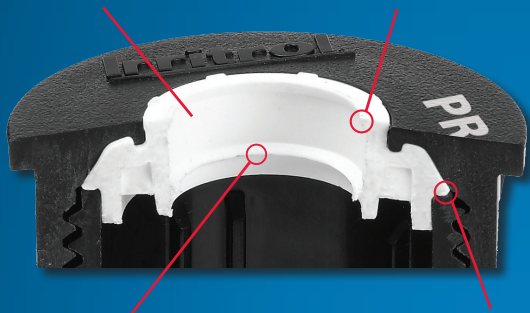

Pressure-activated lip seal ensures a positive seal around the riser and reduces "flow-by"

Lip creates positive seal to prevent body to cap leaks

MODELS

Model	Description
I-PRO300	3" Pop-Up Body
I-PRO400	4" Pop-Up Body
I-PRO400-PR40	4" Pop-Up Body w/ 40 PSI Pressure Regulator
I-PRO400-PR40-CV	4" Pop-Up Body w/ 40 PSI Pressure Regulator/Check Valve
I-PRO600-SI	6" Pop-Up Body w/ Side Inlet
I-PRO600-PR40	6" Pop-Up Body w/ 40 PSI Pressure Regulator
I-PRO600-PR40-CV	6" Pop-Up Body w/ 40 PSI Pressure Regulator/Check Valve
I-PRO600-SI-PR40	6" Pop-Up Body w/ Side Inlet and 40 PSI Pressure Regulator
I-PRO1200-SI-PR40	12" Pop-Up Body w/ Side Inlet and 40 PSI Pressure Regulator
I-PRO1200-SI	12" Pop-Up Body w/ Side Inlet
I-PRO-NPC	Lilac Reclaimed Water Cap
I-PRO-CV	Check Valve



We reserve the right to improve our products and make changes in the specifications and designs without notice and without incurring obligation. Products depicted in this brochure are for demonstration purposes only. Actual products offered for sale may vary in design and features.

TORO

Irritrol