

Application


For use with the new 'blue' Rain Dial®, Rain Dial® Plus and KwikDial® controllers only, with Remote Ready Function. Designed for the professional Irrigation or Maintenance contractor, to operate solenoid valves from a position remote to the controller.

Features

- Adjustable station count control – up to 64
- Adjustable address code on both transmitter and receiver to avoid conflicts with other transmitters.
- LCD display conserves battery power by automatically turning off if no buttons pushed within 10 seconds.
- KwikStart Combination kit includes transmitter, receiver, remote adaptor assembly and standard cable harness kit.

Specification

- Transmitter Power source: 9 volt alkaline battery (supplied)
- Receiver Power Source: 5VDC @ 10mA-25mA (max) (supplied from the controller)
- Maximum Number of Stations Controlled: 64 (default setting is 12 stations)
- Transmitter Operating range (line of site): Approximately 50m to 90m
- Preset Station Run Time: 10 minutes (non-changeable)
- Operating Temperature: -10°C to +60°C
- Storage Temperature: -30°C to +65°C
- Weather Resistance: Transmitter/ Receiver – Not Protected, Receiver Plug Assembly – Protected (when installed in conduit and protective cover is in place).

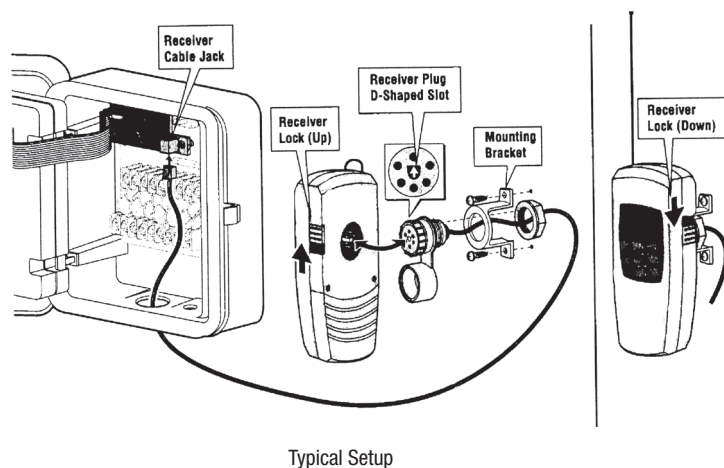

Ordering Information

Code	Description
KSR-KIT	KwikStart Combination Kit to suit RainDial Plus
KSR-KIT-K	KwikStart Combination Kit to suit KwikDial, 'blue' Rain Dial
101KDA	Remote adaptor assembly to suit KwikDial
KSR-ADP	Remote adaptor assembly to suit RainDial Plus