

### Application

For use in residential drip or spray/jet irrigation systems. Rugged plastic construction with one-piece moulded "bonnet".


### Features

- Available in three models, 13 mm Mini-Barb™, 19 mm Mini-Barb™, and 20 mm BSP Mini-Thread Solenoid Valve
- Working pressure range, 20-1400 kPa
- Internal filter to reduce risk of valve blockages
- For use with low density polyethylene tubing with barbed outlet providing positive sealing
- Simple operation for reliable performance
- Heavy duty engineering plastic construction
- Australian made


### Electrical Specifications

- Solenoid: 24 volt AC, 50 Hz
- Inrush current: 0.5 amp
- Holding current: 0.33 amp

Dimensions (L × W × H)			
Size	Length (mm)	Width (mm)	Height (mm)
13	80	54	62
19	90	54	62
20	76	54	62

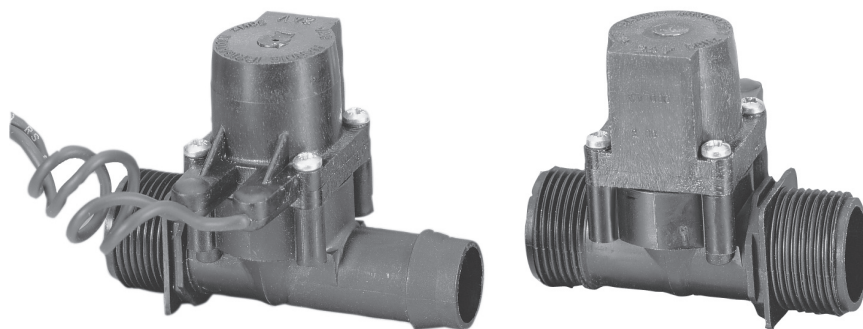

Mini Valves  
Small in size but big in performance.

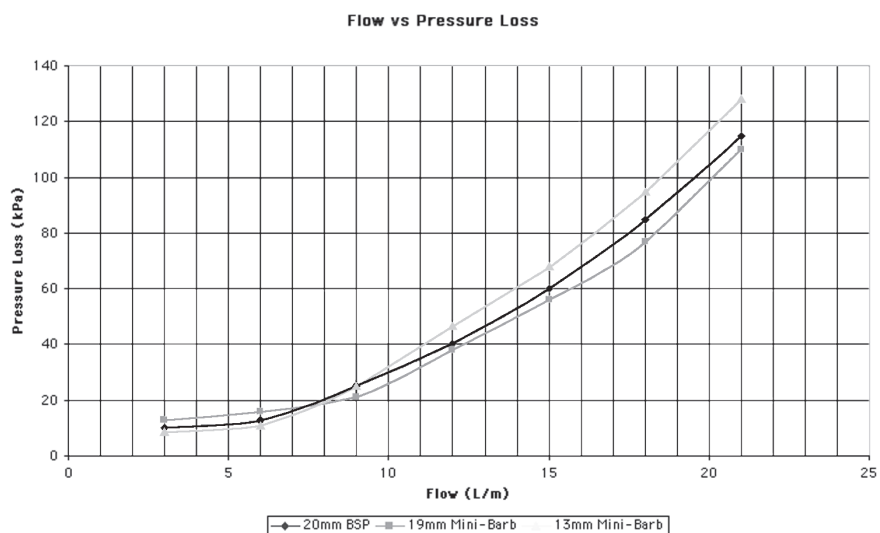

Ordering Information			
Code	Description	Inlet	Outlet
1012313	13 mm Mini-Barb™ Solenoid Valve	20 mm BSPM	13 mm Barb
1012316	20 mm BSP Mini-Thread Solenoid Valve	20 mm BSPM	20 mm BSP
1012312	19 mm Mini-Barb™ Solenoid Valve	20 mm BSPM	19 mm Barb