

### Quick Coupling Turf Valves

Rugged, strong. Designed for use with movable or removable turf sprinkler equipment in commercial installations.

- One or two piece brass construction for a wide range of applications
- Weighted cover to prevent dirt entry
- Optional lockable orange vinyl cover uses valve key handle as locking key
- Lilac colour rubber top to indicate reclaimed water use (sold separately)
- Pressure rating: 1000 kPa

### Quick Coupling Valve Keys

Provides instant sprinkler or hose swivel connection to quick coupling valve.

- Durable de-zinc resistant brass construction
- Double as security key on lock-up models (1013472 and 1013474 only)

### Swivel Elbows

Provides swivel connection of hose to coupler to prevent hose kinking.

- Durable de-zinc resistant brass construction




Swivel Elbows are used to prevent hose kinking when connecting a hose to a coupler



The range of Quick Coupling Turf Valves is extensive with models to suit almost every need

Valve Keys are used to pen Quick Coupling Valves

Quick Coupling Valves – Flow vs Pressure

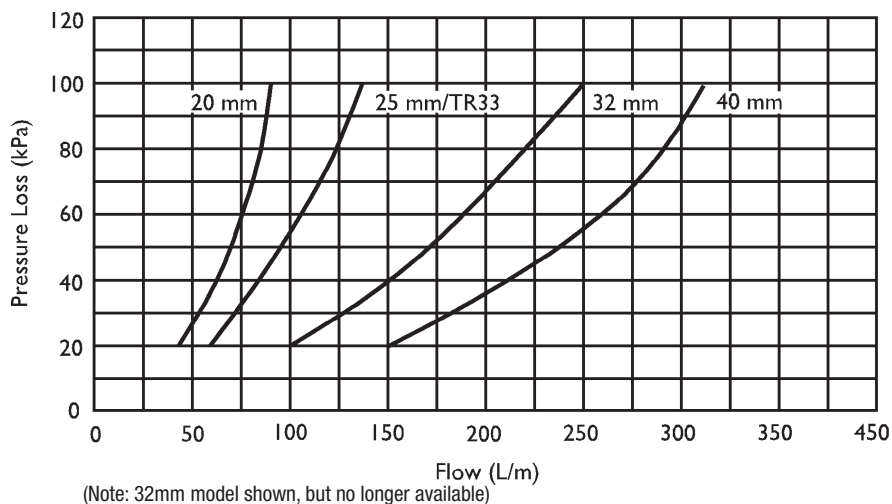

Ordering Information	
Code	Description
<b>Quick Coupling Valves</b>	
1013451	#2 20 mm Two Piece Body
1013453	#33 25 mm One Piece Body
1013454	#3B 25 mm Two Piece Body
1013456	#6 40 mm Two Piece Body
1013450	TR33 25 mm One Piece Body
<b>Rubber Cover</b>	
1013463	RT Rubber Top & Screw, Yellow, suits all models
1013457	Lilac Rubber Top & Screw, suits all models
<b>Valves with Locking Cover</b>	
1013464	#33LU 25 mm One Piece Body
1013465	#3BLU 25 mm Two Piece Body
<b>Quick Coupling Valve Keys</b>	
1013470	#2 25 mm (M) 20 mm (F), 2 Lug Valve Key, suit 1013451
1013472	#3B 25 mm (M) 20 mm (F), 2 Lug Valve Key, suit 1013453, 1013454
1013474	#6F 40 mm (M), 32 mm (F), 1 Lug Valve Key, suit 1013456
1013469	TR33, 25 mm (M), 1 Lug Valve Key, suit 1013450
<b>Swivel Elbows</b>	
1013482	#3 25 mm Female × 25 mm Male Swivel Elbow (suits 1013472)
1013484	#5 40 mm Female × 32 mm Male Swivel Elbow (suits 1013474)