

TORO®

E Series Battery Powered Ride-on Mower

RECHARGE YOUR YARD

Introducing Toro's all-new E Series battery powered ride-on mower

Achieve maximum productivity with minimum effort with Toro's newest ride-on battery powered tractor mower.

Featuring a 72V rechargeable battery, this powerful machine offers a quiet and convenient mowing experience. Power through your garden clean-up in no time, the eS3000's compact design and top-of-the-line specifications means you can create a beautiful lawn with more time to enjoy it.



toro.com.au

FEATURES




POWERFUL

Powered by a 72V brushless motor with up-to 2 hours (8,000 sq/m) of run time.



DYNAMIC

Mow in reverse. Effortlessly shift between mulching to side discharge modes.

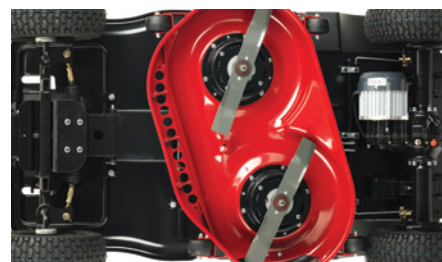

HASSLE-FREE

No belts, pulleys, spark plugs, fuel or oil.



PRODUCTIVE

10 positions of cutting height from 2.5 cm up to 10.5 cm.



AGILE

76 cm (30") deck to fit in tight spaces with a nimble 46cm turning circle.



EFFICIENT

Quiet operation. Low maintenance. Simple recharge.



CONVENIENT

Modern comforts: high back seat, cup holder, LED front lights, cruise control and USB connector.



EASY TO OPERATE

Easy to operate, simple controls.



VERSATILE

Add even more functionality, the Tow Hitch allows for optional accessories to be fitted.

eS3000SD 72V Ride-on Lawn Mower (76 cm) MODEL No. 75500	
TRANSMISSION MOTOR	Single motor with a rating of 800w. Powered by an integrated battery with mains charging cable (in place charging) Lead acid AGM 72V
RUN TIME	Up to 2 hours or 8000m ²
DECK SIZE	76 cm (30 inches)
DECK CONFIGURATION	Right side discharge, two blade mid-mounted rotary. Formed steel housing with welded mounting brackets
DECK SPINDLES	Two motors (800 watts each) on each spindle, powering the rotation of each blade
HEIGHT OF CUT	2.5 cm to 10.6 cm (1 to 4.2 inches) HOC in 10 increments
STEERING CONTROL	Ergonomic standard steering wheel
WHEELBASE	107 cm (42.1 inches)
TURNING CIRCLE	46 cm
TYRES	33.0 x 16.5 – 15.2 cm (13.0 x 6.5 – 6.0 inch), pneumatic tyre with symmetrical tread
SEAT	Adjustable, hinged mounting, with spring suspension
SPEED	
GROUND SPEED – MOW	0 to 5 km/h (0 to 3.1 mph)
GROUND SPEED – FORWARD	0 to 8 km/h (0 to 5 mph)
GROUND SPEED – REVERSE	0 to 5 km/h (0 to 3.1 mph)
DIMENSIONS	
NET WEIGHT	188 kg
OVERALL HEIGHT	106 cm (41.7 inches)
OVERALL WIDTH	100 cm (39.4 inches) – With the deflector down 82 cm (32.3 inches) – With the deflector up (deck width)
OVERALL LENGTH	148 cm (58.3 inches)
ACCESSORIES AND ATTACHMENTS	
TOOL CARRYING BAG OPTIONS	Part No. 134-6344
REGULAR MAINTENANCE OPTIONS	
BLADES	Part No. 134-5725
WARRANTY	Consumer: Machine 3 years warranty Professional: Machine 30 days warranty Refer to Operator's Manual for further details



* Specifications and design subject to change without notice. Products depicted in this literature are for demonstration purposes only. Actual products offered for sale may vary in design, required attachments and safety features. Consult your local Toro Distributor.

We reserve the right to improve our products and make changes in the specifications, designs and standard equipment without notice and without incurring obligation.

toro.com.au

©2021 The Toro Company.
All Rights Reserved.
30032021/IND-C0222
03-2021



/toroaus



/toroaus



/toroaus



/toroaustralia



Count on it.