
Applications

For use as a backwash valve on Toro's range of stainless steel media filter tanks.

Specifications

Construction Material:

- Body: Cast Iron ASTM A126, class B with fusion epoxy coating
- Valve stem: 304 stainless steel
- Stem Guide Bushing: PVC
- Nuts, Bolts & Washers: 304 stainless steel
- Connections: Grooved victaulic
- Pressure Rating: 1000 kPa

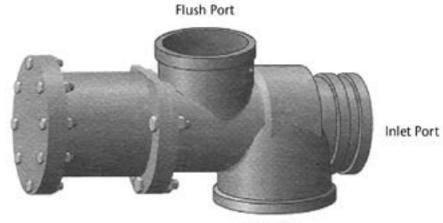

Tank Port

Stainless Steel Filter Backflush Valve Dimensions					
Tank Size (inch/mm)	Flush Valve	Inlet Port (inch/mm)	Tank Port (inch/mm)	Flush Port (inch/mm)	Weight (kg)
24/600	F011526	3 / 80	4/ 100	2 ½ / 65	12.6
36/900	F011526	3/80	4 /100	2 ½ / 65	12.6
45/1100	F011551	4 / 100	5/125	4 / 100	13.6
48/1200	F011551	4 / 100	5 / 125	4 / 100	13.6

Company policy is one of constant improvement and therefore changes in specifications may be made without notice and without incurring liability. Please refer to www.toro.com.au Toro Australia Pty Ltd, 53 Howards Road, Beverley, South Australia, 5009. Phone 1300 130 898, fax (08) 8243 2488. A.B.N. 47 001 310 443